





MULTI PAGE PUSH BUTTON AND TIMER PANEL

(white with blue LED)

Component: VMBLCDWB

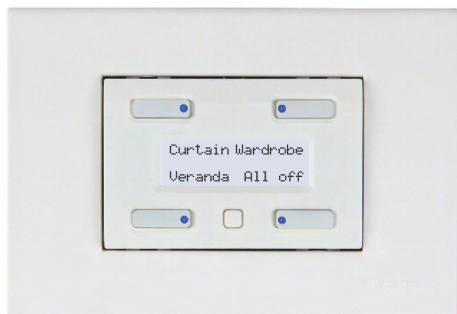

Example with white frame

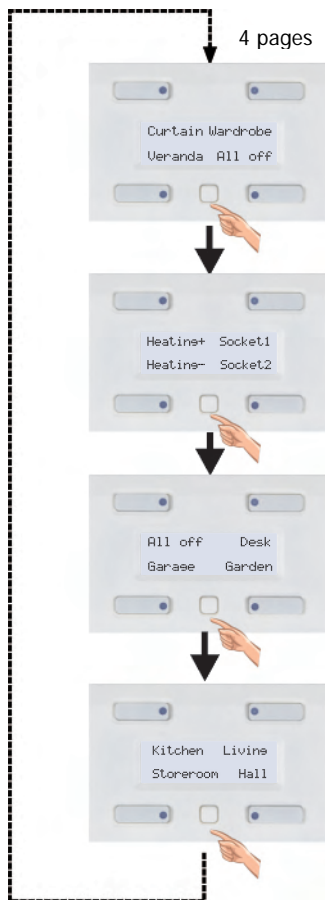

16-Channel pushbutton and timer module with configurable LCD. Via 4 pages of 4 pushbuttons each you can control anything and get instant feedback on whether the command was executed. Verify whether the lights in the children's rooms are off and interfere when necessary. Switch everything off when leaving, choose the desired atmosphere or have it set automatically in the evening: these are only a few of the possibilities.

Compatible with Bticino® frames : Living®, Light®

Features

- push button module with display (2 line 16 characters)
- all 16 channels can have a custom label
- instant access of 4 channels, 12 additional controls via 3 pages
- connects to the Velbus 4 wire system
- blue notification LED for each channel
- buttons with blue LED backlighting
- settings and labels can also be set using USB or RS232 computer interface module (VMB1USB and VMB1RS)
- programmable clock / timer functions, 20 weekly or daily steps (one timer step can control one button or several buttons)
- clock can be set as master clock so that only 1 clock will synchronize all your panels at once

Specifications

- white LED backlight
- velbus connection using CANBUS data protocol
- each channel can activate up to 255 modules on the bus
- power supply: 12V...18Vdc / 30mA
- 16 channels *
- minimum wall cut-out: 70w x 50h x 20d mm
- optional: CR2032 back-up battery for clock

* 1 VMBLCDWB module takes 2 addresses

